



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 309 166 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
07.05.2003 Bulletin 2003/19

(51) Int Cl.7: **H04N 1/00, H04N 1/327**

(21) Application number: **02257359.6**

(22) Date of filing: **23.10.2002**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Saito, Hitoshi**
Ohta-ku, Tokyo (JP)

(74) Representative:
Beresford, Keith Denis Lewis et al
BERESFORD & Co.
2-5 Warwick Court,
High Holborn
London WC1R 5DH (GB)

(30) Priority: **31.10.2001 JP 2001334076**


(71) Applicant: **CANON KABUSHIKI KAISHA**
Tokyo (JP)

(54) **Internet facsimile communication system and internet facsimile communication adaptor**

(57) An internet facsimile communication system capable, in the internet facsimile based on the Recommendation T.38, of receiving an incoming call for a facsimile communication regardless of the setting of receiving mode in the facsimile apparatus thereby avoiding a drawback that a person responds to a facsimile communication.

The internet facsimile communication system comprises an adaptor for connection with an IP network and a G3 facsimile apparatus, in which the adaptor changes the format of a call signal for calling the G3 facsimile apparatus, between an incoming call for a facsimile communication and other incoming call, thereby informing the G3 facsimile apparatus of an incoming call for the facsimile communication.

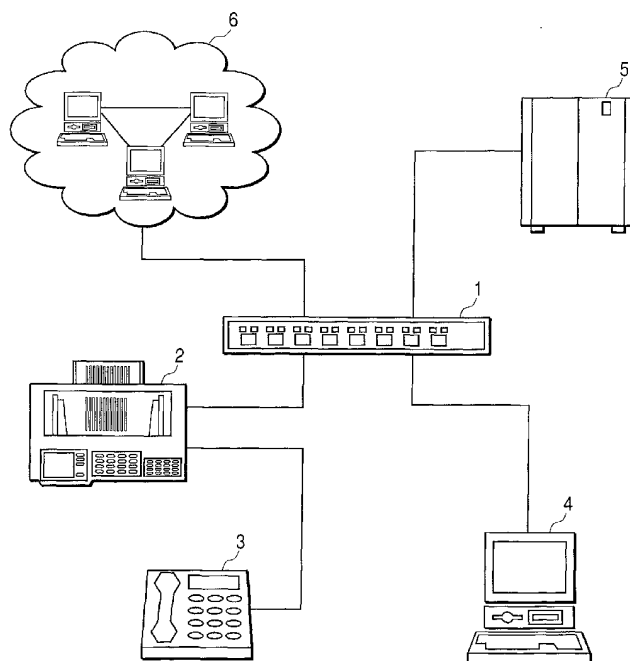FIG. 1



EP 1 309 166 A1

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to an internet facsimile communication system provided with (1) an internet facsimile adaptor apparatus which is connectable with a PSTN network and an IP network and is provided also with an analog port, and (2) a facsimile apparatus connected to the above-mentioned analog port.

Related Background Art

[0002] Recently, the ITU-T issued the Recommendation H.323 as a standard for communication of voice and image through the IP network. Also the ITU-T issued the Recommendation T.38 for real-time facsimile communication utilizing the IP network.

[0003] In response thereto, there is commercialized an adaptor based on such recommendations H.323 and T.38.

[0004] Such adaptor based on the Recommendations H.323 and T.38 is provided with a port for connection to the IP network and a port for connection to a telephone or a facsimile apparatus. By the adaptor, in case of an incoming call from the IP network, a voice call is subjected to voice encoding/decoding according to the encoding method defined in the Recommendation H.323 so as to ring a telephone set, and in case of a facsimile communication, the communication executed according to the Recommendation T.38 is converted into a system of the Recommendation T.30 so as to call for the facsimile apparatus.

[0005] An adaptor of this kind is usually provided with a port for connection to the IP network and also with a port for connection to the PSTN network.

[0006] Thus, a channel to be used is switched according to the necessity, since the connection with the IP network alone cannot establish communication with the telephone or the facsimile apparatus connected to the PSTN network.

[0007] The facsimile apparatus is to be basically connected to the PSTN network, and, at the reception of a call in such connection, it is not possible to judge whether the content of the communication is a voice communication or a fax communication. On the other hand, since there is a requirement of using one telephone line both for the telephone set and the facsimile apparatus, the facsimile apparatus is mostly provided with plural operation modes such as "TEL mode", "FAX mode", "FAX/TEL switching mode", etc and is used by switching such modes according to the necessity.

[0008] In the above-mentioned "TEL mode", a FAX incoming call is not automatically responded but an incoming call is always responded by the telephone, and the facsimile apparatus is thereafter manually activated

if necessary. In the "FAX mode", a FAX incoming call is automatically responded by the facsimile apparatus to initiate a facsimile communication. In the "FAX/TEL switching mode", the facsimile apparatus receives an incoming call and judges whether the counterpart is a person or a facsimile apparatus, and, in case of the person, calls the telephone set, but, in case of the facsimile apparatus, initiates the facsimile communication.

[0009] On the other hand, in case of the internet facsimile, the adaptor side can know in advance whether the content of communication is a voice communication by VoIP or a facsimile communication according to T.38.

[0010] However, since the adaptor and the facsimile apparatus are usually connected with a two-wire telephone line without any other interface, it is not possible to transmit additional information on the content of connection, so that, depending on the setting of the facsimile apparatus, there may be encountered a drawback that the incoming call is responded by the facsimile apparatus even when the adaptor side knows it is a voice communication, or inversely by the telephone even when the adaptor side knows it is a facsimile communication.

[0011] It is easily possible to avoid such drawback by connecting an exclusive I/F between the adaptor and the facsimile apparatus thereby transmitting additional information, but the preparation of such particular facsimile apparatus leads to an increased cost and precludes free combination of the adaptor and the facsimile apparatus, thereby restricting the range of selection.

SUMMARY OF THE INVENTION

[0012] A concern of the present invention is to provide an internet facsimile communication system and an internet facsimile communication adaptor capable of avoiding a situation where an incoming call evidently identifiable as a facsimile communication is received by a person or an incoming call evidently identifiable as a voice communication is received by a facsimile apparatus and, in case an incoming call cannot be identified as a voice communication or a facsimile communication, there can be executed a telephone preferential mode, a FAX preferential mode or a FAX/TEL auto switching mode according to the setting of the facsimile apparatus.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013]

Fig. 1 is a block diagram showing the configuration of an internet facsimile communication system constituting an embodiment of the present invention; Figs. 2A and 2B are views showing the format of a call signal to be used in the above-mentioned embodiment;

Fig. 3 is a flow chart showing the function of an

adaptor apparatus 1 in the above-mentioned embodiment; and

Fig. 4 is a flow chart showing the function of a facsimile apparatus 2 side in the above-mentioned embodiment.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0014] Fig. 1 is a block diagram showing the configuration of an internet facsimile communication system 100 constituting an embodiment of the present invention.

[0015] In the internet facsimile communication system 100, an internet facsimile adaptor apparatus 1 connects a PSTN network, a facsimile apparatus 2, a telephone set 3, a PC 4, a station exchange 5 (PSTN network) and an IP network 6, and is provided with an IP port for connection with the IP network 6.

[0016] The adaptor apparatus 1 also has a function as a router and is directly connected to the IP network 6 through a channel of a rate of about 128 Kbps, but it is also possible to separate the router therefrom and substitute a router interface. In such case, there can be employed such a router interface as 100BASE-T.

[0017] The adaptor apparatus 1 is provided with a LINE port for connection with the PSTN network. The PSTN network is assumed to be composed of analog telephone lines, but an ISDN may be used as the PSTN network.

[0018] The adaptor apparatus 1 is further provided with an analog port for connection with the telephone set 3, the facsimile apparatus 2, etc., and such analog port is connected to a terminal device such as a telephone set to be compatible in electrical characteristics to the analog PSTN network. In the present embodiment, the adaptor apparatus 1 is provided with a single analog port.

[0019] The adaptor apparatus 1 is further provided with a LAN port for connecting thereto a network device such as a PC. In the present embodiment, the LAN port is assumed to be composed of an ordinary Ethernet (trade name) of 100BASE-T.

[0020] The ordinary facsimile apparatus 2 is connected to the analog port of the adaptor apparatus 1. The facsimile apparatus 2 is also provided with a TEL port for connection with a child telephone.

[0021] The ordinary telephone set 3 is connected, in the present embodiment, to the TEL port of the facsimile apparatus 2, but may also be directly connected to the analog port of the adaptor apparatus 1 in case it has plural analog ports.

[0022] The PC 4 is connected to the LAN port of the adaptor apparatus 1.

[0023] In addition to the foregoing, there are provided the station exchange 5 for the PSTN network, and the IP network 6.

[0024] In the following there will be explained the for-

mat of call signals to be employed in the present embodiment.

[0025] Figs. 2A and 2B show the formats of the call signals to be used in the present embodiment.

[0026] Fig. 2A shows, as a first call signal CI1, a non-ringing call signal (non-ringing call signal for F network) which is a tone signal of 1300 Hz, and a double-ring signal (a call signal of a sequence different from the ordinary call signal used in PSTN network).

[0027] The double-ringing signal is a call signal of a different sequence, and is same as a second call signal in the amplitude and in the frequency, but has an ON-time of 300 ms, an OFF-time of 300 ms and an ON-time of 300 ms, within a cycle time of 3 seconds.

[0028] Fig. 2B shows a second call signal CI2. The second call signal CI2 has a format commonly used in the PSTN network, and consists, in case of Japan, of an AC signal of 16 Hz at 75 V, having an ON-time of 1 second within a cycle time of 3 seconds.

[0029] In the following there will be explained the function of the adaptor apparatus 1 in the present embodiment.

[0030] Fig. 3 is a flow chart showing the function of the adaptor apparatus 1.

[0031] The adaptor apparatus 1, having two channel I/F ports for the PSTN network and the IP network, monitors the incoming call on both channels in a stand-by state.

[0032] A step S301 checks whether a PSTN incoming call (an incoming call from the PSTN network) is received. In case the PSTN incoming call is received, whether it is a telephone call or a facsimile call cannot be identified, so that the sequence proceeds to a step S307 to call the analog port with a second call signal CI2.

[0033] In case the step S301 determines that the PSTN incoming call is not received, a step S302 checks whether an IP incoming call (an incoming call from the IP network) is received. If the IP incoming call is not received, the sequence returns to the step S301 to repeat the foregoing procedure.

[0034] In case the IP incoming call is received (S302), a step S303 checks whether the IP incoming call is for voice communication. If so, a phase A (call setting) of the standard H.323 is initiated, whereby the content of the communication can be confirmed. If the voice communication is thus confirmed, the sequence proceeds to a step S307 to call the analog port by the second call signal CI2.

[0035] If the IP incoming call is not for the voice communication (S303), a step S304 checks whether it is for a facsimile communication. In case it is for the facsimile communication, the phase A (call setting) of the standard H.323 also declares a facsimile communication according to T.38, so that the facsimile communication can be confirmed. If the incoming call is not for the a facsimile communication, the sequence proceeds to a step S305 for connection to the LAN port. The function of the LAN port is not contained in a scope of the present em-

bodiment and will not, therefore, be explained further.

[0036] In case the IP incoming call for the facsimile communication based on the standard T.38 is confirmed (S304), the sequence proceeds to a step S306 for calling the analog port with the first call signal C11.

[0037] The first call signal C11 is a non-ringing call signal of the F network, having a tone of 1300 Hz for example, but a double-ring signal can also be used similarly.

[0038] Then the facsimile communication is executed (S308). The function of the adaptor during the facsimile communication is same as that defined in the Recommendation T.38 and will not be explained in detail.

[0039] In case the communication is terminated in a normal/abnormal state after the facsimile apparatus responds to the first call signal C11, or in case a calling station disconnects the call while the facsimile apparatus does not respond to the first call signal C11, the process is terminated and the sequence returns to the start of the process.

[0040] Also, after the analog port is called with a second call signal C12 (S307), there is executed the voice communication (S308). In case the analog port is released after a response to the analog port, or in case the calling station disconnects the call while the second call signal C12 is not responded, the process is terminated and the sequence returns to the start of the process.

[0041] In the foregoing there has been explained the function of the adaptor apparatus 1.

[0042] In the following there will be explained the function of the facsimile apparatus side in the present embodiment.

[0043] Fig. 4 is a flow chart showing the function of a side of the facsimile apparatus 2 in the present embodiment.

[0044] A step S401 checks whether the first call signal C11 is received. In case the first call signal C11 is detected, the sequence proceeds to a step S408. In the present embodiment, as explained in the foregoing, the first call signal is assumed to be a non-ringing call signal of the F network, namely a tone of 1300 Hz. Since such non-ringing call signal is exclusive for the facsimile communication, so that the facsimile apparatus unconditionally initiates the facsimile communication.

[0045] In case a double-ring signal is used as the first call signal C11, the facsimile apparatus may recognize that such signal is different from an ordinary call signal but cannot identify that it is for the facsimile communication.

[0046] Therefore, the facsimile apparatus is so preset as to unconditionally execute the facsimile communication in case of receiving the aforementioned double-ring signal. The control method itself for switching the operation after a call reception depending on the wave form of the call signal is already known and will not be explained in detail, but such setting allows to use the double-ring signal as the call signal exclusive for the fac-

simile communication, like the tone signal of 1300 Hz.

[0047] In case the first call signal C11 is not detected (S401), it is checked whether the second call signal C12, which is similar to the call signal ordinarily used in the PSTN network, is received (S402).

[0048] In case the second call signal C12 is not detected (S402), the sequence returns to the step S401 for repeating the above-explained procedure.

[0049] In case the second call signal C12 is detected (S402), a step S403 checks an operation mode of the facsimile apparatus 2. This check is conducted because an operation of the facsimile apparatus operates according to the setting thereof, since, in case the second call signal C12 is received, it is not possible to identify whether the incoming call is for the voice communication or for the a facsimile communication.

[0050] In case the operation mode is a FAX mode (S403), there is initiated the facsimile communication (S408).

[0051] In case the operation mode is not the FAX mode (S403), whether it is a TEL mode is checked (S404). If so (S404), the voice communication is started (S407).

[0052] In case the operation mode is not the TEL mode (S404) either, a FAX/TEL auto switching mode is executed (S405). Since this function is already known, there will not be given a detailed explanation, but the facsimile apparatus 2 captures a channel and monitors a signal from a partner station. In this operation, there may be suitably executed the transmission of a voice response or a pseudo ring-back tone. If a CNG signal, namely a tone of 1100 Hz, from the partner station is detected within a predetermined time, the partner station is identified as an apparatus provided with an auto calling function and thus the facsimile communication is initiated (S408).

[0053] If the CNG signal cannot be detected, the partner station is probably a person, so that the voice communication is initiated (S407).

[0054] In case the operator executes an off-hook operation of the telephone set 3 and then an on-hook operation, or in case the calling station releases the channel before the response of an operator, the step S407 terminates the process and the sequence returns to the start of the procedure.

[0055] The facsimile communication (S408) is already known and will not be explained in detail. When the facsimile communication is terminated regardless whether in normal/abnormal state, the sequence returns to the start of the process.

[0056] In the foregoing, there has been explained the process in the side of the facsimile apparatus 2.

[0057] The above-described embodiment allows to prevent a situation where an incoming call evidently identifiable as the a facsimile communication is received by a person or the incoming call evidently identifiable as the voice communication is received by the facsimile apparatus 2, and, on the incoming call not identifiable as

the voice communication or the facsimile communication, to execute the telephone preferential operation, the facsimile preferential operation or the FAX/TEL auto switching operation according to the setting of the facsimile apparatus.

[0058] Also the facsimile apparatus 2 to be used in the present embodiment does not require the addition of any special specification, and as such facsimile apparatus, a commercially ordinary facsimile apparatus is available. Such facsimile apparatus can therefore be freely selected among various models and can be easily obtained with a low cost.

[0059] Thus, the above-described embodiment informs whether an incoming call is for the voice communication or for the facsimile communication, by changing the format of the call signal for calling the facsimile apparatus from the adaptor, thereby enabling an appropriate response at the facsimile apparatus.

[0060] One of the call signals used in the embodiment is equivalent to that use in the PSTN network, and, in case of Japan, so-called single-ring signal consisting of repetition of an ON state for 1 second and an OFF state for 2 seconds.

[0061] Another of the call signals has a format clearly distinguishable from the foregoing, for example a tone signal of 1300 Hz, called as FC used in the non-ringing call-receiving service in the F network, or a so-called double-ring signal consisting of repetition of an ON state for 0.3 seconds, an OFF state for 0.3 seconds, an ON state for 0.3 seconds and an OFF state for 2 seconds.

[0062] Most of the facsimile apparatus adapted to the F network in Japan accommodates the first-mentioned FC signal. Also the latter double-ring signal is used in a ringing tone differentiating service in Japan and in a DRPD service in the U.S. Therefore, the facsimile apparatus capable of recognizing the difference of these signals and selecting the operation accordingly is available regardless of a manufacturer.

[0063] Consequently, by recognizing the incoming call for the facsimile communication at the adaptor side and executing the activating operations by recognition of these call signals, most of the facsimile apparatus can execute a process matching the incoming call.

[0064] The above-described embodiment provides an effect of preventing a situation where an incoming call evidently identifiable as the facsimile communication is received by a person or the incoming call evidently identifiable as the voice communication is received by the facsimile apparatus 2, and, on the incoming call not identifiable as the voice communication or the facsimile communication, executing the telephone preferential operation, the facsimile preferential operation or the FAX/TEL auto switching operation according to the setting of the facsimile apparatus.

Claims

1. An internet facsimile communication system comprising (1) an internet facsimile adaptor apparatus which is connectable to a PSTN network and an IP network and is provided with an analog port connectable with a facsimile apparatus, and (2) a facsimile apparatus which is connected to said analog port:

wherein said internet facsimile adaptor apparatus has a function of generating, in said analog port, a first call signal to be used in case an incoming call for facsimile communication is recognized and a second call signal to be used in other cases; and

said facsimile apparatus executes, in case of receiving said first call signal, a call reception regardless of the setting of said facsimile apparatus, and, in case of receiving said second call signal, executes or refuses a call reception according to the setting of the transmission.

2. A system according to claim 1, wherein said case where an incoming call for facsimile communication is recognized includes a case of receiving an incoming call of a real-time internet facsimile according to the Recommendation T.38 from said IP network.

3. A system according to claim 2, wherein said second call signal is same in format as an ordinary call signal used in said PSTN network, and said first call signal is a non-ringing call signal of an F network.

4. A system according to claim 2, wherein said second call signal is same in format as an ordinary call signal used in said PSTN network, and said first call signal is a call signal different in sequence from an ordinary call signal used in said PSTN network.

5. An internet facsimile communication adaptor which is connectable to a PSTN network and an IP network and is provided with an analog port connectable with a facsimile apparatus, the adaptor comprising:

a function of generating, in said analog port, a first call signal to be used in case an incoming call for facsimile communication is recognized and a second call signal to be used in other cases;

wherein said adaptor outputs said first call signal to the analog port in case an incoming call for a real-time internet facsimile communication according to the recommendation T.38 is received from said IP network, or outputs said second call signal to the analog port in case an incoming call for a voice communication is received from the PSTN network or the IP network.

6. An adaptor according to claim 5, wherein said second call signal is same in format as an ordinary call signal used in said PSTN network, and said first call signal is a call signal different in sequence from an ordinary call signal used in said PSTN network. 5
7. An internet facsimile communication method comprising steps of:
- providing an internet facsimile adaptor connectable to a PSTN network and an IP network and provided with an analog port connectable with a facsimile apparatus; 10
- causing said adaptor, in case of receiving an incoming call for a real-time internet facsimile communication according to the recommendation T.38 from said IP network, to output a first call signal to be used in case an incoming call of a facsimile communication is recognized, to said analog port; and 15
- causing said adaptor, in case of receiving an incoming call for a voice communication from the PSTN network or the IP network, to output a second call signal to be used in case an incoming call other than a facsimile communication is recognized, to said analog port. 20
8. A method according to claim 7, wherein said second call signal is same in format as an ordinary call signal used in said PSTN network, and said first call signal is a call signal different in sequence from an ordinary call signal used in said PSTN network. 25
- 30
- 35
- 40
- 45
- 50
- 55

FIG. 1

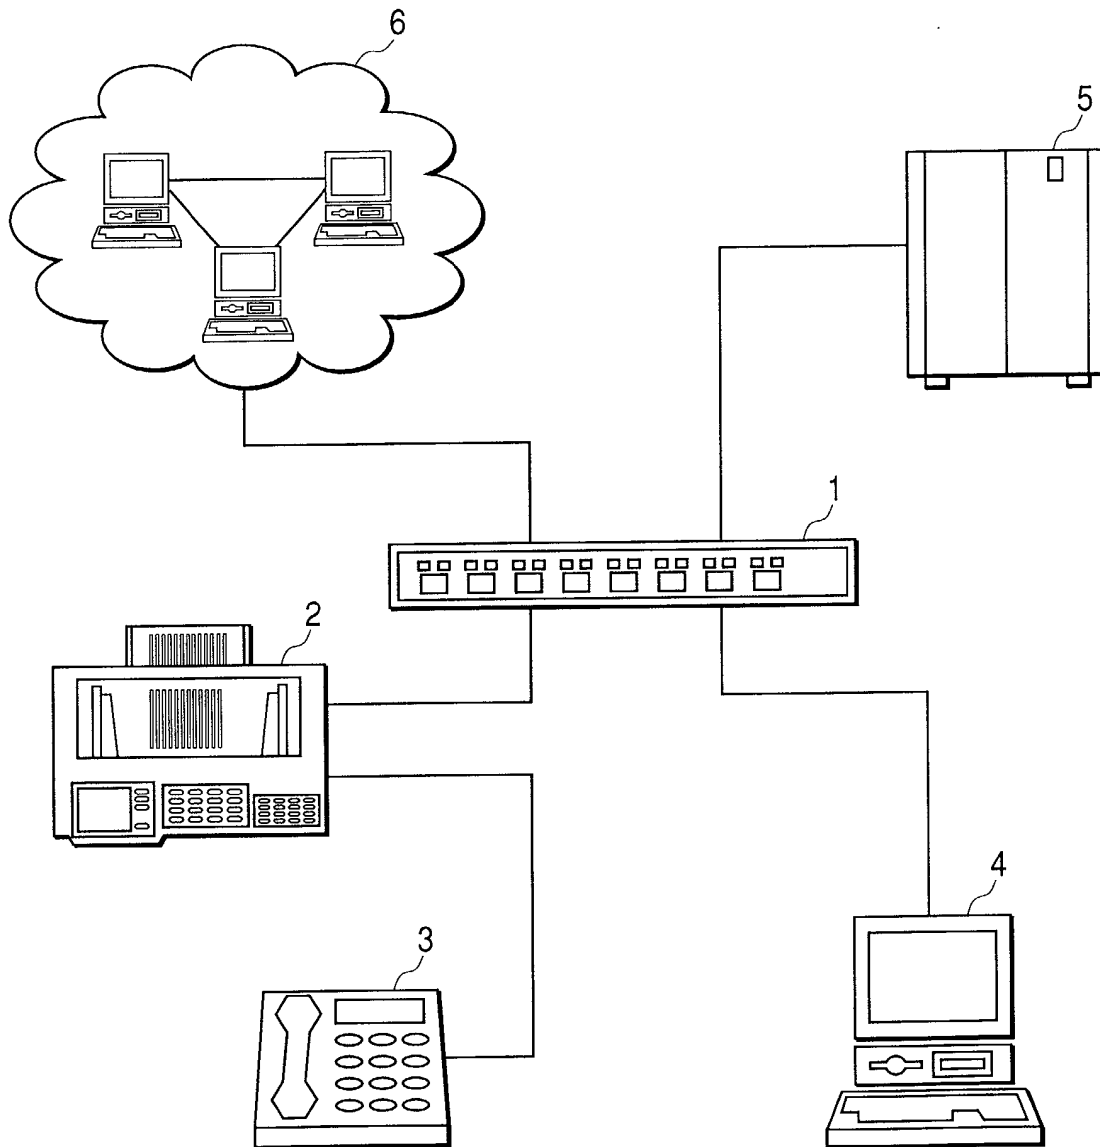


FIG. 2A

1ST CALLING SIG (CI1)

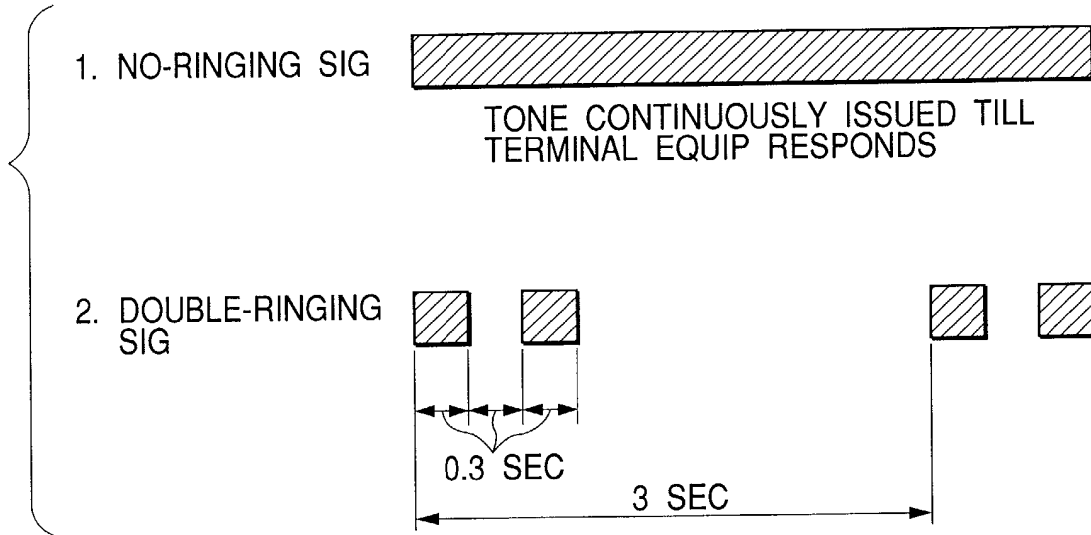


FIG. 2B

2ND CALLING SIG (CI2)

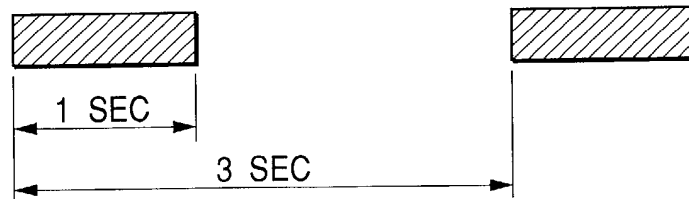



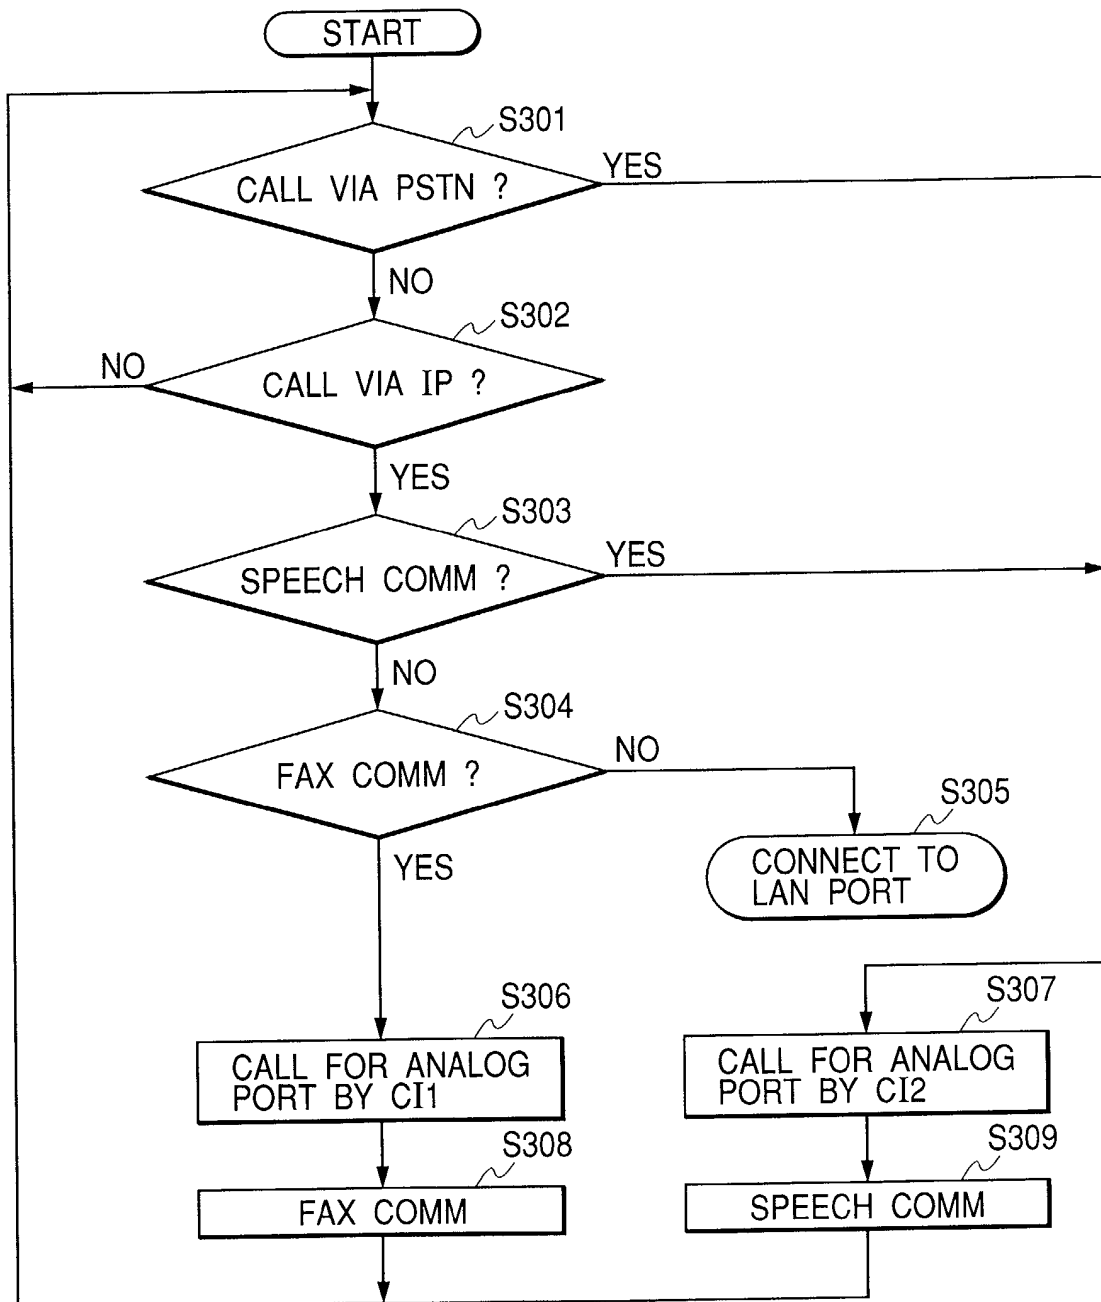
FIG. 3

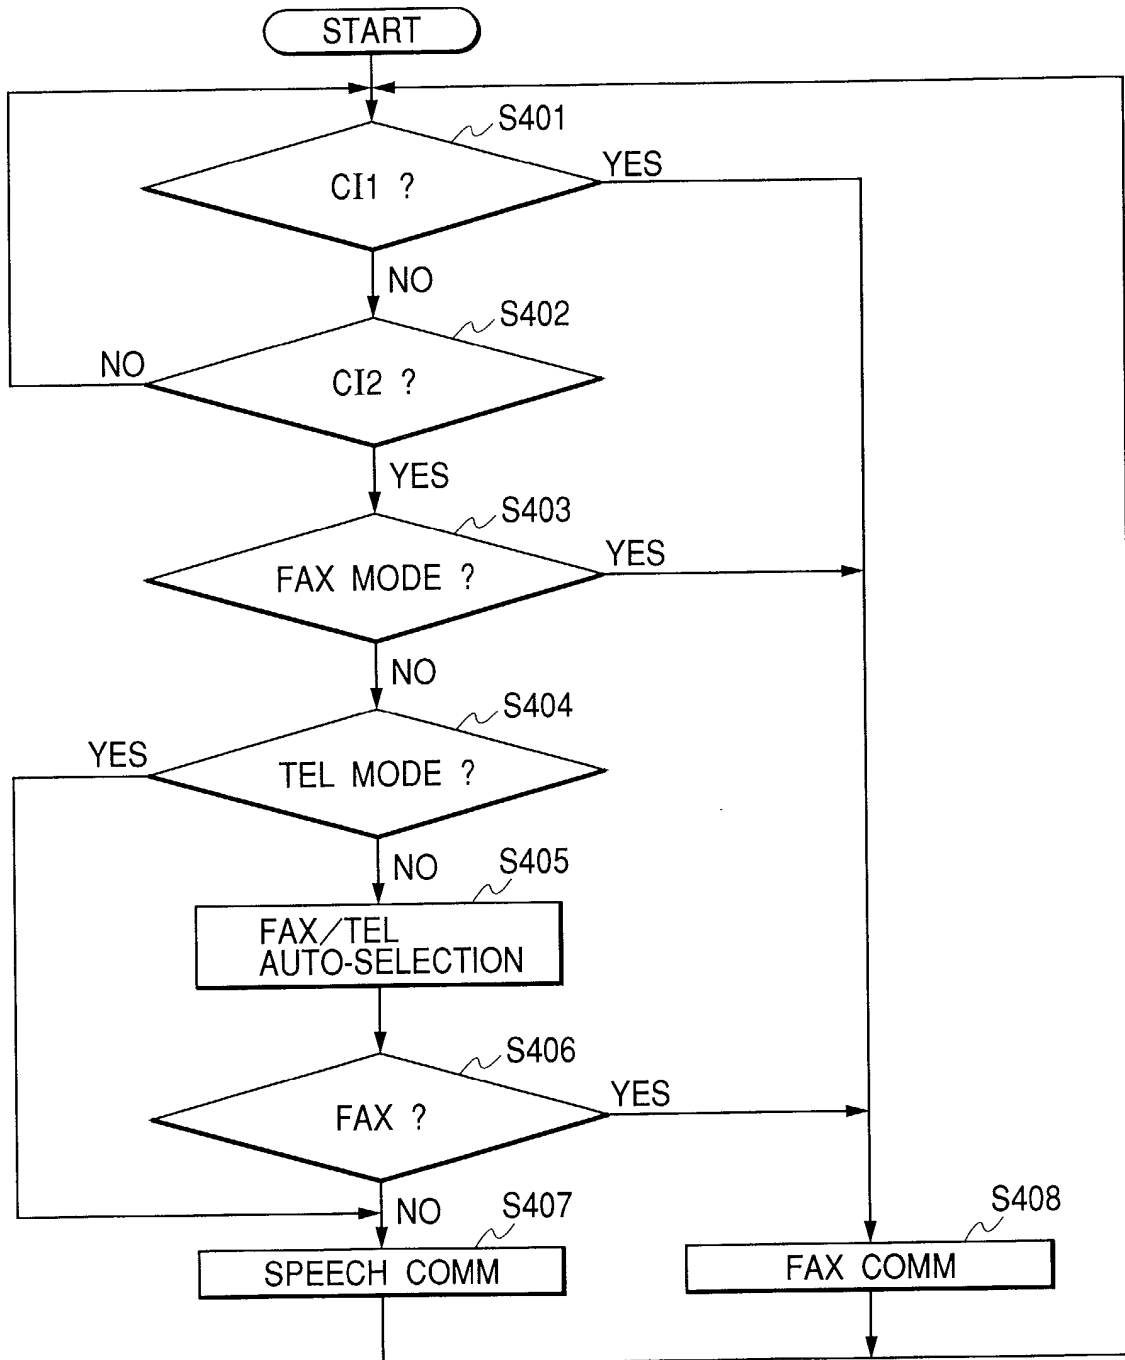FIG. 4



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 25 7359

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	US 2001/014910 A1 (BOBO CHARLES R) 16 August 2001 (2001-08-16) * page 4, column 1, paragraphs 62-67; figure 1 *	1,5,7	H04N1/00 H04N1/327
Y	YU S-F ET AL: "A multimedia gateway for phone/fax and MIME mail" COMPUTER COMMUNICATIONS, ELSEVIER SCIENCE PUBLISHERS BV, AMSTERDAM, NL, vol. 20, no. 8, 25 August 1997 (1997-08-25), pages 615-627, XP004126715 ISSN: 0140-3664 *Entire document*	1,5,7	
Y	US 5 748 712 A (NONOMURA YUTAKA) 5 May 1998 (1998-05-05) * claim 1 *	1,5,7	
A	WO 95 19089 A (EXFAX TECH PTY LTD) 13 July 1995 (1995-07-13) * page 9, line 21 - page 10, line 34; figure 1 *	1-8	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	PATENT ABSTRACTS OF JAPAN vol. 1995, no. 09, 31 October 1995 (1995-10-31) & JP 07 162553 A (BROTHER IND LTD), 23 June 1995 (1995-06-23) * abstract *	1-8	H04N
A	EP 1 119 182 A (CANON KK) 25 July 2001 (2001-07-25) * abstract; figure 1 *	1-8	
-/--			
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 24 January 2003	Examiner Waern, G
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 25 7359

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	WO 00 79780 A (WILSHIRE CELLULAR INC ;FORTE STEPHEN P (US)) 28 December 2000 (2000-12-28) * abstract; figure 1 * -----	1-8	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 24 January 2003	Examiner Waern, G
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 25 7359

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-01-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2001014910 A1	16-08-2001	US 6350066 B1	26-02-2002
		US 5870549 A	09-02-1999
		US 5675507 A	07-10-1997
		AU 755321 B2	12-12-2002
		AU 9679398 A	27-04-1999
		CA 2305459 A1	15-04-1999
		EP 1034651 A1	13-09-2000
		JP 2001519624 T	23-10-2001
		WO 9918716 A1	15-04-1999
		CA 2232397 A1	31-10-1996
		EP 0870238 A1	14-10-1998
		WO 9634341 A1	31-10-1996
US 5748712 A	05-05-1998	JP 3229469 B2	19-11-2001
		JP 7162639 A	23-06-1995
WO 9519089 A	13-07-1995	AU 694473 B2	23-07-1998
		AU 1408695 A	01-08-1995
		WO 9519089 A1	13-07-1995
		CA 2180836 A1	13-07-1995
		CN 1138400 A	18-12-1996
		US 5696600 A	09-12-1997
JP 07162553 A	23-06-1995	US 5991371 A	23-11-1999
EP 1119182 A	25-07-2001	JP 2001203849 A	27-07-2001
		CN 1306363 A	01-08-2001
		EP 1119182 A2	25-07-2001
		US 2002051173 A1	02-05-2002
WO 0079780 A	28-12-2000	AU 5885600 A	09-01-2001
		WO 0079780 A1	28-12-2000